

K60 Gastight Syringe









- Standard 1/4-28UNF thread, good tightness
- Wetted Material: Borosilicate(glass), PTFE(piston /syringe outlet) , high precision, corrosion resistance
- Maximum pressure rating 0.68Mpa(Bar)
- Easy clean and sterilization, reusable
- Service Life: 3 million times no leakage (water)
- Flexible connections to meet different applications

RZ-K60 - ① 5ML - W - 1 - U
 Model No. Volume Male thread Single channel Thread 1/4-28UNF

50ML	1ML
25ML	500µl
10ML	250µl
5ML	100µl
2.5ML	50µl

Dimension (Unit: mm)

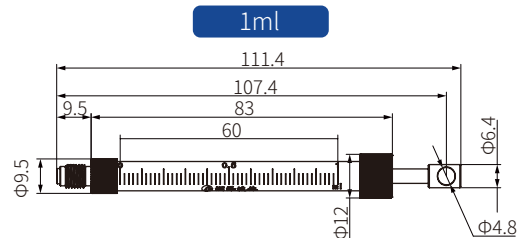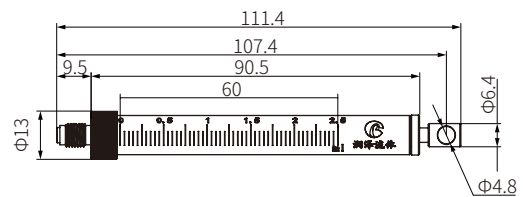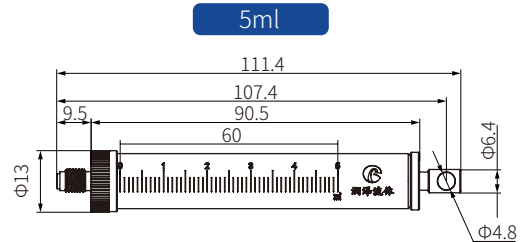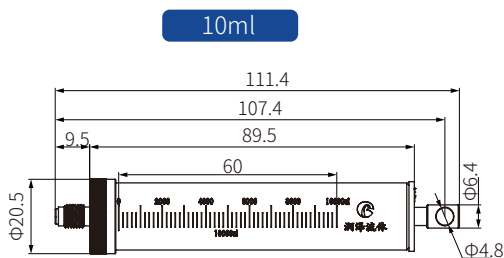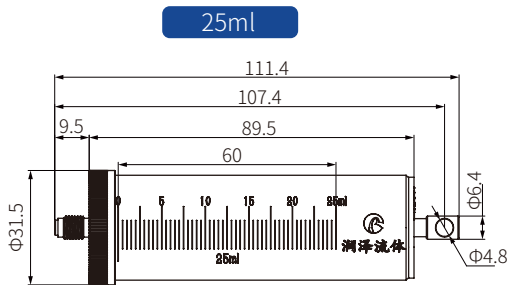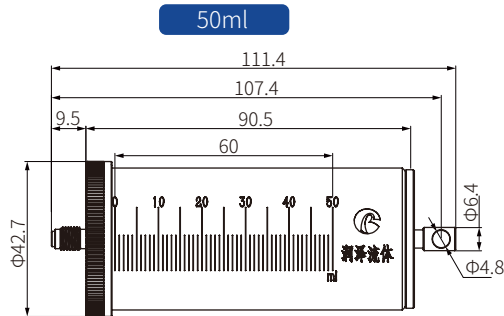

µl level: share the same dimension with 1ml

